





Hajtástechnika^{Kft.}


Hernyócsavaros kivitel

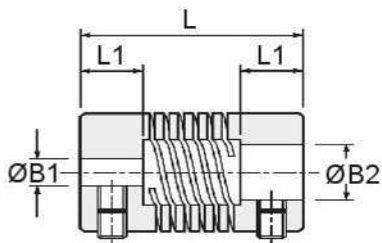


3 bekezdésű kivitel



Hasított kivitel

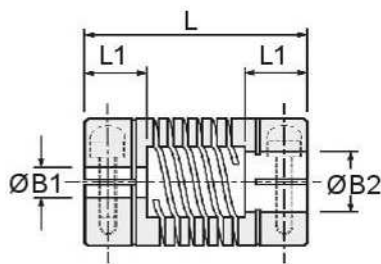

3 bekezdésű kivitel



3 BEKEZDÉSES TENGELYKAPCSOLÓ MÉRETEK

Típus	Cikkszámok		ØD	L	L1	Furat átmérők			Herny. csav.	Szorító csav.	Szög eltérés °	Párhuzam. eltérés mm	Nyomaték Nm
	Herny. csav.	Hasított				Min. B1	Min. B2	Max. B1&B2					
06	724.06	–	6.4	12.7	3.2	1.0	2.0	3.0	M2	–	3	0.07	0.40
09	724.09	–	9.5	14.2	4.5	2.0	3.0	3.18	M2.5	M1.6	3	0.1	0.40
	–	725.09											
13	724.13	–	12.7	19.1	6.0	3.0	4.0	5.0	M3	M2	5	0.127	0.90
	–	725.13											
16	724.16	–	15.9	20.3	6.5	3.0	4.0	6.35	M4	M2.5	5	0.127	1.50
	–	725.16											
19	724.19	–	19.1	22.9	6.5	4.0	4.76	8.0	M4	M2.5	5	0.127	2.50
	–	725.19											
25	724.25	–	25.4	31.8	9.0	5.0	6.0	10.0	M5	M3	5	0.127	4.0
	–	725.25											
32	724.32	–	31.8	44.5	12.0	6.0	8.0	14.0	M6	M4	5	0.127	6.0
	–	725.32											

Anyag:

Tengelykapcsoló: Alumínium L 168 vagy magasabb minőség

Csavarzat: Acél ötvözet, fekete

Hőtartomány: –40°C to +120°C